


# 1000S Impact Trough Idlers

Normally supplied in rubber but can also be supplied in Neoprene. Bearings sealed for life.

Bearing capacity of carrying rolls:

Dynamic: 12.26KN

Static: 7.60KN

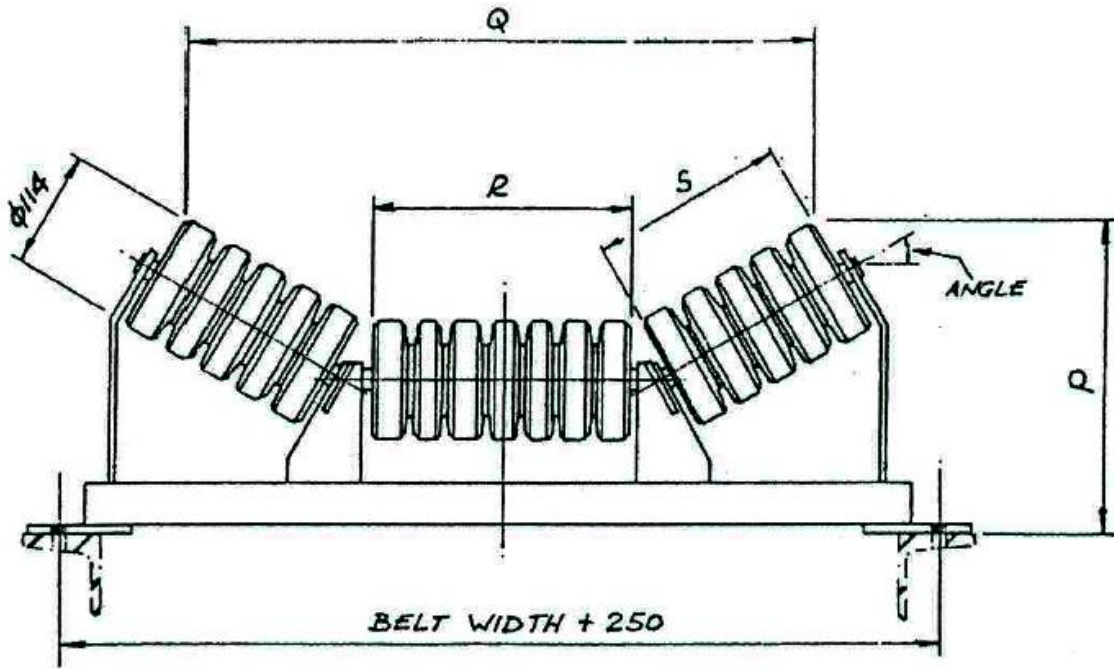

	Q - 30°	P - 30°	R - Roll Length	S - Roll Length	Q - 45°	P - 45°
<b>Belt 350</b>	386	243	172	114	332	266
<b>Belt 400</b>	436	243	222	114	380	266
<b>Belt 450</b>	483	266	172	172	412	306
<b>Belt 500</b>	533	272	222	172	462	306
<b>Belt 600</b>	620	296	222	222	534	342
<b>Belt 650</b>	680	296	280	222	594	342
<b>Belt 750</b>	780	296	382	222	694	342
<b>Belt 800</b>	832	296	432	222	746	342
<b>Belt 900</b>	932	296	534	222	844	342